



269A9265

KIT

| REVISIONS |             |      |       |
|-----------|-------------|------|-------|
| SYM       | DESCRIPTION | DATE | APP'D |

PRODUCTION

2.75 DIA. STOCK TUBING

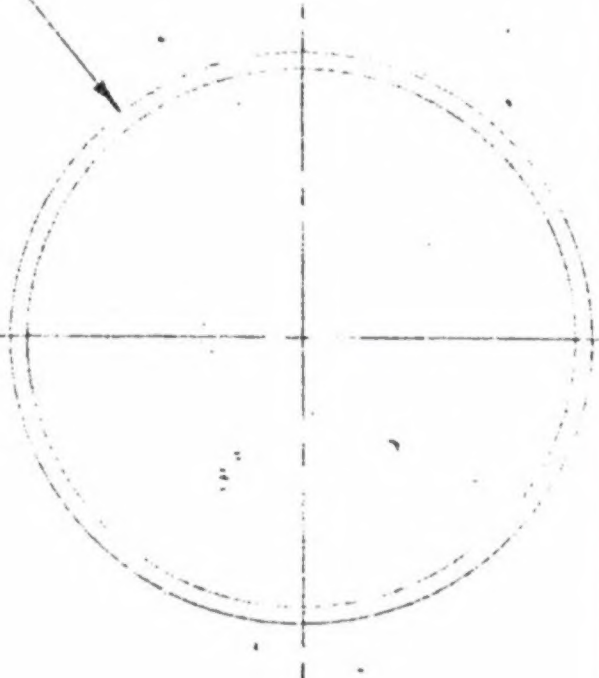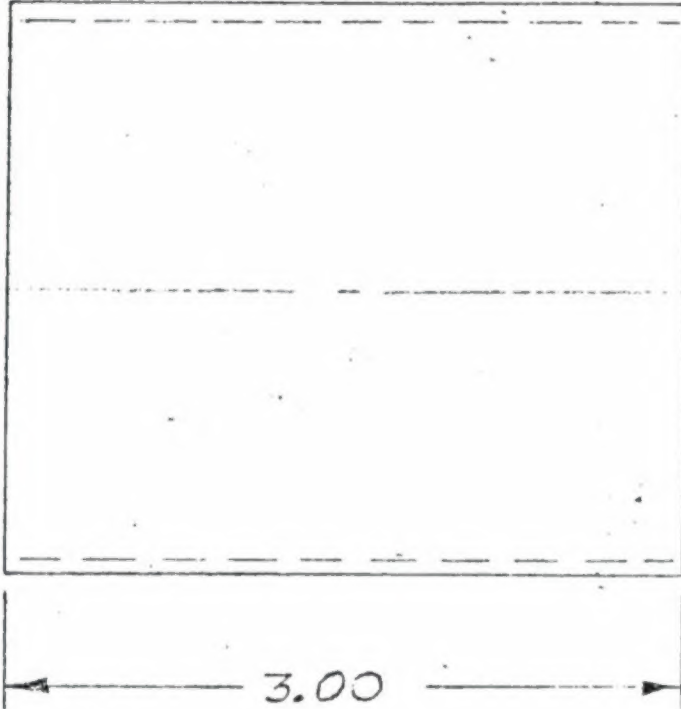


FILE COPY

- 3. REMOVE BURRS
- 2. IDENTIFY PER HP 8-5 (AK STAMP)
- 1. IRIDITE PER HP 4-57

NOTES:

OR EQUIV

|  |          |                               |                |   |  |
|--|----------|-------------------------------|----------------|---|--|
| 2.75 O.D. .062/.125 WALL                     |          | 2.75 DIA. STOCK TUBING 2024-C |                | COMM.   |  |
| REQD   | PART NO. | NAME                          | SIZE           | DESCRIPTION                                     | SPECIFICATION  |
| UNLESS OTHERWISE SPECIFIED                   |          | DRWN <i>L. Johnson</i>        | <i>4/6/62</i>  | SLEEVE —<br>269A5618<br>REMOVAL,<br>ARBOR PRESS | HUGHES TOOL COMPANY<br>AIRCRAFT DIVISION<br>CULVER CITY, CALIFORNIA<br> |
| DIMENSIONAL TOLERANCES                       |          | CHK'D                         | <i>4/6/62</i>  |   |  |
| 3 PLACE DECIMAL ± .010                       |          | APP'D <i>Koppany</i>          | <i>7/27/64</i> |   |  |
| 2 PLACE DECIMAL ± .03                        |          | APP'D <i>Heaus</i>            | <i>11/1/65</i> |   |  |
| ANGULAR ± 0°30'                              |          | APP'D                         |                |   |  |
| DIMENSIONS TO BE MET BEFORE PLATING.         |          | APP'D                         |                |   |  |
| INNER RADIUS .062 ON C                       |          | APP'D                         |                | SCALE FULL                                      | 269A9265   |
| BORES AND SPOT FACES OF 1.250 DIA. OR LESS — |          | APP'D                         |                | CODE 02731                                      | SHEET 1 OF 1   |
| .093 RADIUS ON GREATER THAN 1.250 DIA.       |          | APP'D                         |                |   |  |